

Small Diameter Submersible



Shown with optional NPT conduit and optional FEP cable

APPLICATIONS

- Well head measurement
- Groundwater monitoring
- Level measurement in open bodies of water
- Sewage lift and pumping stations
- Settling ponds and rainwater basins

611 SERIES

- Hydrostatic level measurement for use in applications including bore holes and wells with small diameters (outer diameter 0.87")
- Low power output signals for battery-powered applications, and optional temperature output available
- 5:1 turndown using optional HART® signal
- 316L Stainless Steel, PVDF and polyurethane wetted parts
- CE compliant to suppress RFI, EMI and ESD
- Certifications pending:
 - ATEX
 - CSA
 - IECEx

SPECIFICATIONS

Output signals	4 mA to 20 mA, 2-wire 4 mA to 20 mA + HART®, 2-wire 4 mA to 20 mA x 2 (pressure and temperature)* 0.1 Vdc to 2.5 Vdc, 3-wire 0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature)*
Pressure ranges**	0 inH ₂ O to 50 inH ₂ O through 0 psig to 100 psig
Accuracy	± 1.0% of span (± 0.5% of span optional) Includes non-linearity, hysteresis, zero offset and end value deviation per IEC 61298-2 Accuracy after turndown via HART®, ≤ ±1.25% of scaled span (0.75% optional) Temperature sensor 14 °F to 176 °F (-10 °C to 80 °C): ≤ ± 3.3 °F
Stability	≤ ± 0.1% of span per year
Switch on time	Output signals without HART®: ≤150 ms Output signals with HART®: ≤250 ms
Settling time	Output signals without HART®: ≤100 ms Output signals with HART®: ≤250 ms
Durability	> 100,000,000 full scale cycles
Temperature ranges	Compensated 32 °F to 176 °F (0 °C to 80 °C) Effect ± 0.01%/ °F for zero and span Standard Media 14 °F to 122 °F (-10 °C to 50 °C) Optional Media -40 °F to 176 °F (-40 °C to 80 °C) Storage -40 °F to 176 °F (-40 °C to 80 °C)
Power requirement***	4mA to 20 mA: 8 Vdc to 36 Vdc 4 mA to 20 mA and HART®: 12-36 Vdc 0.1 to 2.5 Vdc: 3.6 - 36 Vdc
Load limitations	4 mA to 20 mA: ≤ (Vpower - 8 V) / 0.022 A 4 mA to 20 mA and HART®: ≤ (Vpower - 9.6 V) / 0.022 A
Proof pressure	5 times range
Measuring element	Cap: PVDF Sensor: 316 stainless steel, optional Hastelloy C-276 Cable: Polyurethane, optional FEP
Connection	316 stainless steel
Housing material	316 stainless steel, 318 LN optional
Environmental rating	IP68
Electromagnetic rating	CE compliant to EMC norm EN 61326:2014 RFI, EMI and ESD protection
Electrical protection	Reverse polarity protection, short circuit and resistance to overvoltage :DC 40V and increased overvoltage for lightning protection. Normal discharge current ≥10 kA, Rise time 8/20 μs
Max. submersion depth	325 ft./100 meters
Vibration	4 g's according to IEC 60068-2-6
Weight	Approximately 10.6 oz. with standard nosecone - cable .5 lb per 10 ft.

* Temperature measurement is based on the media temperature range

** Other ranges and measuring units available including bar, mbar, MPa, kPa, and mH₂O

*** Unregulated



WARNING: This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


ORDERING INFORMATION								
SERIES	611		611H 318LN/Hastelloy C-276					
PRESSURE RANGES	50 inH ₂ O	0 inH ₂ O to 50 inH ₂ O	5	0 psig to 5 psig (11.5 ftH ₂ O)	50	0 psig to 50 psig (115 ftH ₂ O)	100A	0 psia to 100 psia
	100 inH ₂ O	0 inH ₂ O to 100 inH ₂ O	10	0 psig to 10 psig (23.1 ftH ₂ O)	100	0 psig to 100 psig (230.8 ftH ₂ O)		
	150 inH ₂ O	0 inH ₂ O to 150 inH ₂ O	15	0 psig to 15 psig (34.6 ftH ₂ O)	25A	0 psia to 25 psia		
	250 inH ₂ O	0 inH ₂ O to 250 inH ₂ O	25	0 psig to 25 psig (57.7 ftH ₂ O)	50A	0 psia to 50 psia		
	psig = gauge pressure psia = absolute pressure Other ranges and measuring units available on request							
ACCURACIES	1	±1.0 of span	2	±0.5% of span				
OUTPUT SIGNALS	1	4 mA to 20 mA, 2-wire	48	0.1 Vdc to 2.5 Vdc, 3 wire**				
	43	4 mA to 20 mA, 2-wire and HART® signal	49	0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature)*, **				
	47	4 mA to 20 mA x 2 (pressure and temperature)*						
PROCESS CONNECTIONS	N	Nosecone	W	Weighted nosecone				
ELECTRICAL CONNECTIONS	XX	Standard polyurethane (PUR) cable	62-XX	Polyurethane (PUR) cable with 1/2" NPT conduit connection				
	38-XX	Optional FEP cable	63-XX	FEP cable with 1/2" NPT conduit connection				
	NOTE: XX = length of cable in feet							
OPTIONS	CBC	Cable Clamp	LP	Lightning Protection	JB	Cable Junction Box (NEMA 4X)	HT	Increased media temperature (-40 °F to 176 °F)

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

* Temperature measurement is based on the media temperature range

** Low power is optimized for battery operation

EXAMPLE

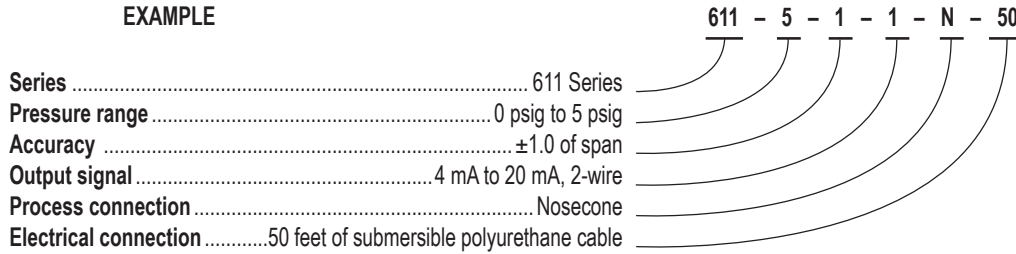

WIRING CODE SCHEMATICS

	Wiring	Cable
4 mA to 20 mA & 4 mA to 20 mA, 2-wire and Hart signal®	+ Supply	Brown
	- Supply	Blue
	Shield	Grey
4 mA to 20 mA x 2 (pressure and temperature)	+ Supply (pressure sensor)	Brown
	- Supply (pressure sensor)	Blue
	+ Supply (temperature sensor)	Green
	- Supply (temperature sensor)	White
	Shield	Grey
0.1 Vdc to 2.5 Vdc, 3 wire	+ Supply	Brown
	- Supply	Blue
	Analog output	Black
	Shield	Grey
0.1 Vdc to 2.5 Vdc x 2 (pressure and temperature)	+ Supply	Brown
	- Supply	Blue
	Analog output (pressure sensor)	Black
	Analog output (temperature sensor)	Green
	Shield	Grey

With protective cap

